



1008 - 3030

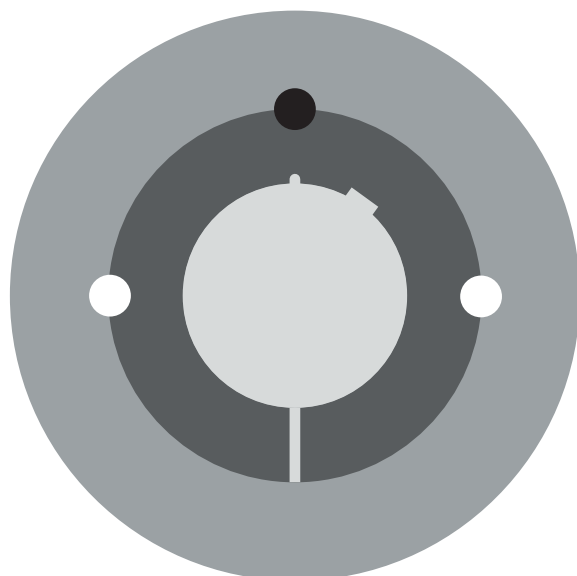

3535 - 5050

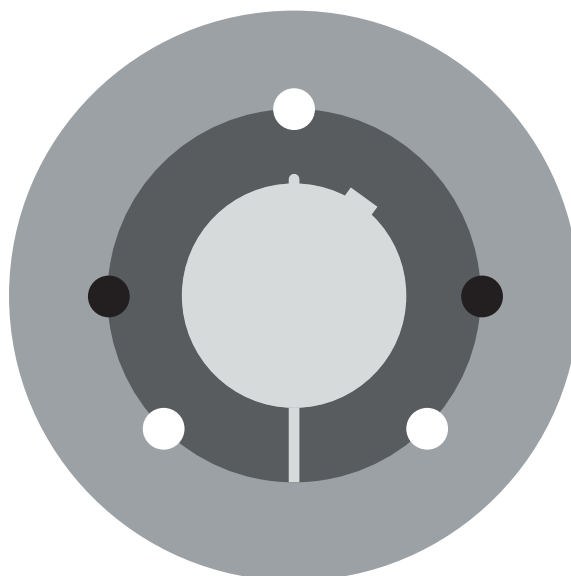

Tapsvormige spanbussen met metrische boring en groef volgens DIN 6885.

	1008	1108	1210	1215	1310	1610	1615	2012	2517	3020	3030	3525	3535	4030	4040	4535	4545	5050
Boordiameter in mm	10	10	11	14	14	12	14	15	16	25	35	35	35	60	40	55	55	70
	11	11	12	15	15	14	15	16	18	28	38	38	38	65	42	60	60	75
	12	12	14	16	16	15	16	18	19	30	40	40	40	75	45	65	65	80
	14	14	15	18	18	16	18	19	20	32	42	42	42	80	48	70	70	85
	15	15	16	19	19	18	19	20	22	35	45	45	45	85	50	75	75	90
	16	16	18	20	20	19	20	22	24	38	48	48	48	90	55	80	80	95
	18	17	19	22	22	20	22	24	25	40	50	50	50	95	60	85	85	100
	19	18	20	24	24	22	24	25	28	42	55	55	55	100	65	90	90	105
	20	19	22	25	25	24	25	28	30	45	60	60	60	115	70	95	95	110
	22	20	24	28	28	25	28	30	32	48	65	65	65		75	100	100	115
	24	22	25	30	30	28	30	32	35	50	70	70	70		80	105	105	120
	25	24	28	32	32	30	32	35	38	55	75	75	75		85	110	110	125
		25	30		35	32	35	38	40	60		80	80		90	115		
		28	32			35	38	40	45	65		85	85		95	120		
						38	40	42	48	70		90	90		100	125		
						40	42	45	50	75		95						
						42		48	55			100						
								50	60									
									65									
Gewicht / kg	0,12	0,16	0,28	0,39	0,32	0,41	0,60	0,75	1,06	2,50	3,75	3,90	5,13		7,68	8,80	12,70	15,17